



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



Publication number:

**0 675 607 A2**

12

## EUROPEAN PATENT APPLICATION

21 Application number: 94308731.2

51 Int. Cl.<sup>6</sup>: H04B 3/46

22 Date of filing: 25.11.94

30 Priority: 30.03.94 US 220068

43 Date of publication of application:  
04.10.95 Bulletin 95/40

94 Designated Contracting States:  
DE FR GB

71 Applicant: **FLUKE CORPORATION**  
P.O. Box 9090  
Everett,  
Washington 98206-9090 (US)

6031 50th Av. N.E.  
Seattle, WA 98115 (US)  
Inventor: **Drucker, Eric R.**  
7701 56th Ave. N.E.  
Seattle, WA 98115 (US)  
Inventor: **Purnell, Lannes S.**  
10029 242nd Pl. S.W.  
Edmonds, WA 98020 (US)

72 Inventor: **Bottman, Jeffrey S.**

74 Representative: **Burke, Steven David et al**  
**R.G.C. Jenkins & Co.**  
26 Caxton Street  
London SW1H 0RJ (GB)

54 **Cable crosstalk measurement system.**

57 A cable crosstalk measurement system provides fault diagnostic information to locates faults in addition to providing a crosstalk versus frequency function to test and troubleshoot LAN cables. In a preferred embodiment, a narrow pulse is introduced into one twisted pair of a standard LAN cable, and another twisted pair in the same cable is monitored for crosstalk signal coupling. A measurement system digitizes crosstalk signals using sequential sampling

of repetitive signals to provide a waveform record that is a reconstructed equivalent time representation of a real-time crosstalk signal. A microprocessor performs a fast Fourier transform of the waveform record to provide crosstalk versus frequency information, while the waveform record is also examined for higher-than-acceptable amplitude levels to locate poor quality or faulty connectors and cables.

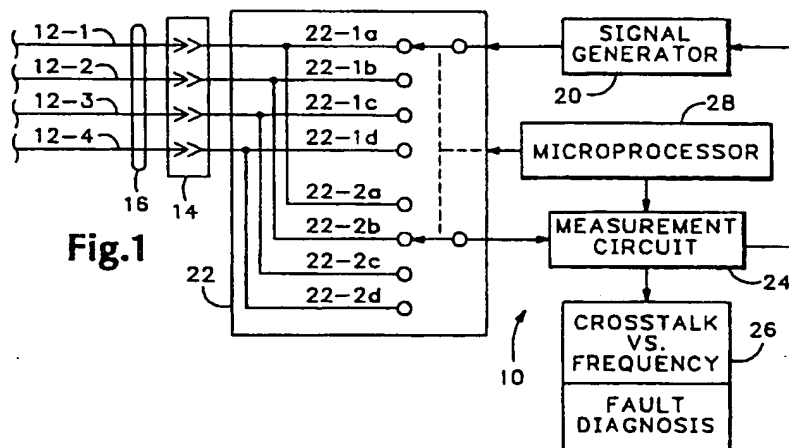


Fig.1

EP 0 675 607 A2

## Background of the Invention

This invention relates generally to cable testing and troubleshooting, and in particular to measuring the crosstalk characteristics between adjacent pairs of cables and extracting diagnostic information to locate faults in cables.

Local Area Networks (LANs) formed by a large number of interconnected computers, work stations, printers, and file servers are becoming increasingly common in the modern office. In a typical installation, LAN cables may be routed through walls, floors, and ceilings of a building. LAN cable systems not only need to be checked out upon installation, but they require constant maintenance, upgrades, and troubleshooting because LAN cables and connectors are subject to breakage, offices and equipment must be moved, and new equipment are added. A LAN system is most commonly implemented by physically connecting all of these devices with copper-conductor, twisted-pair LAN cables, the most common being an eight-wire cable which is configured in four twisted-wire pairs (commonly referred to simply as "twisted pairs") within a flexible wrapper that may include an electrostatic shield, with each end of the cable terminated in an industry-standard connector.

Crosstalk level is a performance parameter indicating the level of signal coupling between separate but adjacent data transmission paths, and thus is of great importance for determining problems in twisted-pair cables in LAN systems. It is desirable that the level of isolation be high (and crosstalk level be low) to avoid interference between transmission paths. Accordingly, crosstalk measurement capability is highly desirable in any test tool to be used in LAN cable testing and troubleshooting.

More sophisticated LAN cable test instruments are often equipped for evaluating crosstalk through standardized near-end crosstalk (commonly referred to as "NEXT") measurements. A conventional method of measuring crosstalk, or NEXT, is to apply a high-frequency sine wave signal to one twisted pair of wires in the cable and measuring the crosstalk signal level in another of the twisted pairs of wires. The sine wave source is incremented in discrete steps across a range of frequencies, while making measurements, and a list of crosstalk versus frequency is generated. This list is compared with a worst-case crosstalk versus frequency function specified for the cable installation under test to determine compliance--that is, whether or not crosstalk levels are acceptable or not. However, this conventional method does not yield any useful diagnostic information to inform the user just exactly what the problem is nor how to fix it. For example, unacceptable crosstalk may be a result of a fault in the cable, such as the cable

being physically crushed at some point, or simply a poor quality patch cord somewhere in a LAN run.

Conventional time domain reflectometers (TDRs) locate faults caused by substantial changes in impedance in a cable, such as opens and shorts, by measuring the elapsed time between a stimulus pulse and a reflected pulse on the same cable; however, such conventional TDRs cannot provide a crosstalk versus frequency function, nor locate a problem such as a faulty or poor quality patch cord that has a perfectly good impedance match to the twisted-pair LAN cable.

## Summary of the Invention

In accordance with the present invention, a cable crosstalk measurement system provides fault diagnostic information to locate the cause of poor crosstalk performance in addition to providing a crosstalk versus frequency function in order to test and troubleshoot twisted-pair LAN cables.

A cable test instrument applies stimulus signals to a selected one twisted pair in a LAN cable while monitoring crosstalk signal coupling on a separate but adjacent twisted pair within the same bundle or cable. A measurement system analyzes any crosstalk signals and provides diagnostic information for locating faults in the cable as well as providing crosstalk versus frequency information to determine whether acceptable or not.

A preferred embodiment of the present invention takes advantage of the well-known fact that the frequency spectrum of a pulse may be determined primarily by the width and amplitude of the pulse. A pulse generator repetitively applies a relatively narrow stimulus pulse (e.g., on the order of four or five nanoseconds) to a switch matrix that directs the stimulus pulse to a selected one of a plurality of twisted pairs while connecting one of the other twisted pairs to a waveform digitizer. The waveform digitizer records the received crosstalk waveform by means of sequential sampling to provide a reconstructed equivalent-time waveform of the crosstalk signal. A fast Fourier transform (FFT) is performed on the digitized crosstalk waveform record to provide, when normalized and scaled, a table of crosstalk versus frequency information. This information may then be used to check against the specified worst-case crosstalk requirements for the particular LAN cable to determine compliance.

In addition, the digitized crosstalk waveform record is examined for relatively large spikes or peaks. The time of occurrence of a spike may be used to approximate with a fair degree of accuracy the physical location along the cable run of the event or situation causing the crosstalk spike. Timing information is provided by recording the



elapsed time from the launch of a stimulus pulse to detection of the spike, and then distance to the fault may be calculated.

In an alternative embodiment, a cable test apparatus discriminates the location of spikes exceeding a predetermined threshold amplitude, and presents only distance-related faults to the user.

It is therefore one object of the present invention to provide a crosstalk measurement system for determining the location of a crosstalk fault or poor crosstalk performance in a multiple-transmission-line cable.

It is another object of the present invention to provide a crosstalk measurement system capable of measuring amplitude versus frequency characteristics of crosstalk between separate but adjacent transmission lines.

It is a further object of the present invention to provide both fault diagnostic information and crosstalk versus frequency information to test and troubleshoot LAN cables.

It is an additional object of the present invention to provide a cable testing and troubleshooting instrument capable of quickly and easily measuring and characterizing crosstalk in cables.

Other objects, features, and advantages of the present invention will become obvious to those having ordinary skill in the art upon a reading of the following description when taken in conjunction with the accompanying drawings.

#### Brief Description of the Drawings

Fig. 1 is a generalized block diagram of a cable testing and troubleshooting apparatus in accordance with the present invention;

Figs. 2A and 2B is near-end crosstalk (NEXT) model showing respectively a measurement structure and a waveform diagram;

Fig. 3 is a preferred embodiment of the present invention in detailed block diagram form; and

Fig. 4 is a block diagram of an alternative embodiment of the present invention.

#### Detailed Description of the Invention

Referring to Fig. 1 of the drawings, there is shown a generalized block diagram of a cable testing and troubleshooting apparatus 10 coupled via an industry-standard connector 14 to one end of an exemplary LAN cable 12 which is configured in four twisted-wire pairs (or simply twisted pairs, as they are known in the relevant industry) 12-1, 12-2, 12-3, and 12-4 within a flexible sheath 16 that may function as an electrostatic shield. It should be pointed out that LAN cables typically are unshielded. A signal generator 20 within apparatus 10 generates stimulus signals to test the LAN cable

12, and such stimulus signals are applied via a switch matrix 22 to a selected one of the twisted-wire pairs. A measurement circuit 24 is coupled to a second one of the twisted-wire pairs via switch matrix 22 to receive any crosstalk signals, that is, signals that result in a coupling of the stimulus signal from the selected twisted-wire pair to the second one. Measurement circuit 24 analyzes the crosstalk signals and provides on a display device 26 crosstalk versus frequency information as well as diagnostic information for locating faults in the LAN cable. In the example shown, the output of signal generator 20 is connected to twisted pair 12-1 through the closed contacts 22-1a of switch matrix 22, and measurement circuit 24 is connected to twisted pair 12-2 through the closed contacts 22-2b of switch matrix 22. A microprocessor 28 provides overall control of the apparatus 10, including establishing signal routing and operation of switch matrix 22, and controlling measurement circuit 24 analyze crosstalk signals. Measurement circuit 24 also issues command signals to signal generator 20 to generate stimulus signals.

In order to provide diagnostic information to locate faults in the LAN cable, a timing relationship must exist between stimulus signals generated by the signal generator 20 and crosstalk signals analyzed by the measurement circuit 24. To gain an appreciation of this timing, refer to the near-end crosstalk, or NEXT, measurement model of Figs. 2A and 2B, which show respectively a model of the measurement structure and a waveform diagram.

In Fig. 2A, cable test instrument 10 is coupled to a near end of a cable including twisted pairs 12-1 and 12-2 in the manner described in connection with Fig. 1. The far end of each twisted pair in the model is terminated with termination resistors 30 and 32, which match the characteristic impedance of the cable. Termination resistors 30 and 32 may suitably be part of a remote unit 34 supplied with cable test instrument 10 connected to the far end of the cable. The near ends of twisted pairs 12-1 and 12-2 are likewise terminated with termination resistors 36 and 38, each of which are equal to one-half the characteristic impedance of the cable, and resistor 40. In a proposed commercial embodiment of the present invention, both the near and far ends of the cable are coupled to balanced-to-unbalanced transformers in order to achieve balanced cable drive and to facilitate functions other than the measurement system described herein; however, the equivalent circuit over the measurement frequency band is as shown in Fig. 2A. Signal generator 20, which suitably may be a pulse generator, generates a stimulus pulse which is launched down the transmission path of twisted pair 12-1. Any crosstalk coupled across to separate but adjacent twisted pair 12-2 propagates back to the measure-

ment system and is developed as a received signal across resistor 40. Let us suppose that a fault, such as a bad connector, exists at some distance  $L_F$  from the near end of cable 12. This fault is modeled by capacitors 44 and 46. It should be noted that the impedance represented by this type of fault is typically large relative to the characteristic impedance of the cable, and therefore would not be located by any test instruments that look for impedance discontinuities, such as time domain reflectometers and the like. However, the impedance modeled by capacitors 44 and 46 causes sufficient coupling to result in NEXT failure.

Referring now to Fig. 2B, a stimulus pulse 50 is generated by signal generator 20 and launched down the transmission path represented by twisted pair 12-1 at a time  $T_0$ . Pulse 50 propagates at a velocity  $V$ , which is a percentage of the speed of light and is approximately equal to eight inches per nanosecond (or 20 centimeters per nanosecond) in an electrical cable, down twisted pair 12-1 to the fault represented by capacitors 44 and 46, where it is coupled across to twisted pair 12-2. The coupled crosstalk signal in turn propagates back to cable test instrument 10 via twisted pair 12-2 at a velocity  $V$ , and arrives at resistor 40 after an elapsed time  $T_F = T_1 - T_0 = 2L_F/V$ . Waveform 52 represents that part of the received signal that is due to equivalent coupling capacitors 44 and 46. Distance to the fault (length of cable from instrument 10 to the fault) may then be calculated as  $L_F = \frac{1}{2} T_F V$ .

A cable testing and troubleshooting apparatus in accordance with a preferred embodiment takes advantage of the well-known fact that the frequency spectrum of a pulse may be determined primarily by the width and amplitude of a pulse such as pulse 50. A relatively narrower pulse 50, e.g., on the order of five nanoseconds, will produce a frequency spectrum that has a greater percentage of its power at higher frequencies, e.g., up to about 100 megahertz, while a relatively wider pulse 50, e.g., on the order of 30 nanoseconds, will produce a frequency spectrum that has a greater percentage of its power at lower frequencies, e.g., up to about 20 megahertz.

A preferred embodiment of the present invention is shown in Fig. 3. Cable test apparatus 10 includes a connector 60 for connecting the cable test apparatus to a cable under test. The connector 60 may be selected to accommodate any type of cable or any number of transmission lines. In the embodiment shown, connector 60 is an industry-standard RJ-45 connector adapted to mate with the connector of a conventional eight-wire LAN cable which is configured in four twisted-wire pairs. Signal generator 20 is a pulse generator which generates a relatively narrow pulse, e.g., on the order of five nanoseconds as described above, upon

initiation of a pulse command signal from an acquisition timing controller 74 (to be discussed later), which in turn is controlled by microprocessor 28. The pulses are repetitively produced about eight microseconds apart, which allows sufficient time to sample crosstalk signals from faults that are a substantial distance from the measurement system so that the measurement system can be used to detect crosstalk faults on virtually any local area network.

Microprocessor 28 is connected via a typical bus structure to a memory 62, which may include both random-access and read-only memories, a keypad 64 for entry of user-defined information, and a display device 66, which may be a flat-panel liquid-crystal display (LCD) device and its associated display circuitry.

Microprocessor 28 also provides a control signal to switch matrix 22, which may suitably consist of digitally-controlled relays of conventional design for routing a stimulus pulse from signals generator 20 to a selected twisted pair, and crosstalk signals from another twisted pair to measurement circuit 24.

Measurement circuit 24 is a waveform digitizer similar to that used for digitizing waveforms of input signals in a conventional digital storage oscilloscope, and therefore includes conventional and well known elements, and is operated in a conventional mode known in art as sequential sampling wherein samples acquired from a number of repetitive signals are later reconstructed in an equivalent-time record representing one real-time signal. This permits sampling a higher effective rate than the available sampling clock rate, which is required to sample crosstalk signals which are artifacts of five-nanosecond duration stimulus pulses.

Crosstalk signals received via switch matrix 22 from the twisted pair being monitored are applied to a sample/hold amplifier 70 which freezes the amplitude of the crosstalk signal long enough to be converted to a digital representation by analog-to-digital converter (ADC) 72. If desired, suitable signal conditioning circuits, such as amplifiers, attenuators, filters, etc., may be interposed in the signal path before digitizing in order to match signal conditions with the capabilities of the waveform digitizer.

Acquisition timing is provided by acquisition timing controller 74, which may suitably be a digital signal processor (DSP) in combination with a programmable logic device and a high-speed (about 60 megahertz in this embodiment) clock oscillator to provide the desired timing and control. Acquisition time controller 74 initiates pulse command signals to signal generator 20, as discussed earlier, and also applies sample/hold signals to sample/hold amplifier 70 and conversion control signals to ADC

72 at a rate of about four megahertz. The sample/hold and ADC control signals are generated in progressively increasing delay increments of two nanoseconds via an internal delay line following initiation of pulse command signals applied to signal generator 20. Thus, while the conversion rate of sample/hold amplifier 70 and ADC 72 in this embodiment is about four megahertz, the well-known sequential sampling technique permits an effective sampling rate of 500 megahertz. In accordance with the well-known Nyquist sampling theorem, this permits sampling crosstalk signals in a frequency spectrum to 250 megahertz.

The converted digitized samples, each representing an instantaneous amplitude of the received crosstalk signal, are transported by the acquisition timing controller to a fast acquisition waveform memory 78. Although the samples are not obtained in chronological order, they are reordered into their proper time sequence when stored in memory 78, as is well known to those skilled in the art. Thereafter, the waveform record is retrieved by microprocessor 28 and moved to memory 62. Thus, the waveform digitizer records the received crosstalk waveform by means of sequential sampling to provide a reconstructed equivalent-time waveform of the crosstalk signal.

A fast Fourier transform (FFT) is performed by microprocessor 28 on the digitized crosstalk waveform record to provide, when normalized and scaled, a table of crosstalk versus frequency information which may be viewed on display device 66. This information may then be used to check against the specified worst-case crosstalk requirements for the particular LAN cable installation to determine compliance.

In addition, the digitized crosstalk waveform record is examined for relatively large spikes or peaks. The time of occurrence of a spike may be used to approximate with a fair degree of accuracy the physical location along the cable run of the event or situation causing the crosstalk spike. Timing information is provided by recording the elapsed time from the launch of a stimulus pulse to detection of the spike, and then distance to the fault may be calculated.

In an alternative embodiment of measurement circuit 24 shown in Fig. 4, a cable test apparatus discriminates the location of spikes exceeding a predetermined threshold amplitude, and presents only distance-related faults to the user. Crosstalk signals received via switch matrix 22 are coupled to a signal conditioning circuit 80, which adjusts the signals to a suitable level for comparison with a predetermined threshold level by comparator 82. That is, if a crosstalk spike or peak voltage exceeds a predetermined level, the output of comparator 82 changes states. A counter 84 is enabled

by initiation of a stimulus pulse and counts high-speed clock signals from a clock 86 until count is stopped by the output of comparator 82. The elapsed time from counter 84 may be read out directly in terms of distance on display device 90.

While we have shown and described the preferred embodiment of our invention, it will be apparent to those skilled in the art that many changes and modifications may be made without departing from our invention in its broader aspects. For example, signal generator 20 generate gated-on short-duration bursts of high frequency sine wave signals to build a crosstalk versus frequency table similar to that produced by conventional cable testers, with the time information for diagnostic fault location being extracted from the gating commands. Also, with appropriate controls and additional circuitry, measurement circuit 24 could be implemented by those skilled in the art as a conventional random-sampling waveform digitizer. Alternatively, single shot acquisition could be implemented with suitable high-speed waveform digitizer circuits and attendant increased cost. It is therefore contemplated that the appended claims will cover all such changes and modifications as fall within the true scope of the invention.



#### Claims

1. A cable testing apparatus, comprising:
  - a signal generator for generating stimulus signals for a first transmission line in a cable under test;
  - measurement means connected to a second transmission line in said cable under test for receiving crosstalk signals produced in response to said stimulus signals and analyzing said crosstalk signals to provide an indication of a location of crosstalk which exceeds a predetermined level.
2. A cable test apparatus in accordance with claim 1 wherein said measurement means also provides an indication of crosstalk versus frequency.
3. A cable test apparatus in accordance with claim 1 wherein said stimulus signals are relatively short-duration pulses.
4. A cable test apparatus in accordance with claim 1 wherein said measurement means is a waveform digitizer which provides a digitized waveform record of said crosstalk signals.
5. A cable test apparatus in accordance with claim 4 further including means for analyzing said digitized waveform record to provide cros-

stalk versus frequency information.

6. A cable test apparatus in accordance with claim 5 wherein said means for analyzing said digitized waveform record is a processor which performs a fast Fourier transform. 5
  
7. A cable test apparatus in accordance with claim 1 wherein said measurement means comprises a means for detecting crosstalk signals which exceed a predetermined threshold, measuring the elapsed time between said stimulus signal and said detected crosstalk signals, and calculating from said elapsed time a distance along said cable under test. 10  
15
  
8. A system for determining the location of a crosstalk fault in pair of transmission lines, comprising:
  - a pulse generator coupled to one of said pair of transmission lines, said pulse generator generating and applying a pulse to said one of said pair of transmission lines responsive to a transmit initiate pulse applied to said pulse generator; 20  
25
  - a waveform digitizer coupled to another of said pair of transmission lines, said waveform digitizer periodically converting samples of a crosstalk signal on said another of said pair of transmission lines to digital representations; 30
  - and
  - processor means coupled to said waveform digitizer to perform an analysis on said digital representations to provide an indication of a location of crosstalk between said pair of transmission lines. 35
  
9. A system in accordance with claim 8 wherein said processor means further provides an indication of a magnitude of said crosstalk at each of said crosstalk locations. 40
  
10. A method of monitoring crosstalk comprising applying stimulus pulses to a first transmission line in a cable under test, monitoring signals produced in response to said pulses in a second transmission line in said cable, and applying a fast Fourier transform to the monitored signals to provide information relating to the relationship between crosstalk and frequency. 45  
50

55

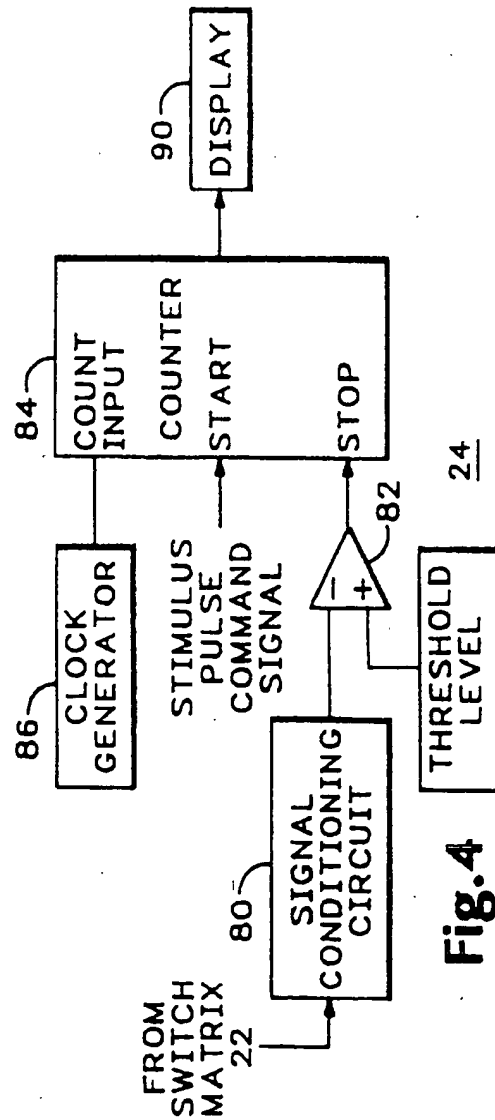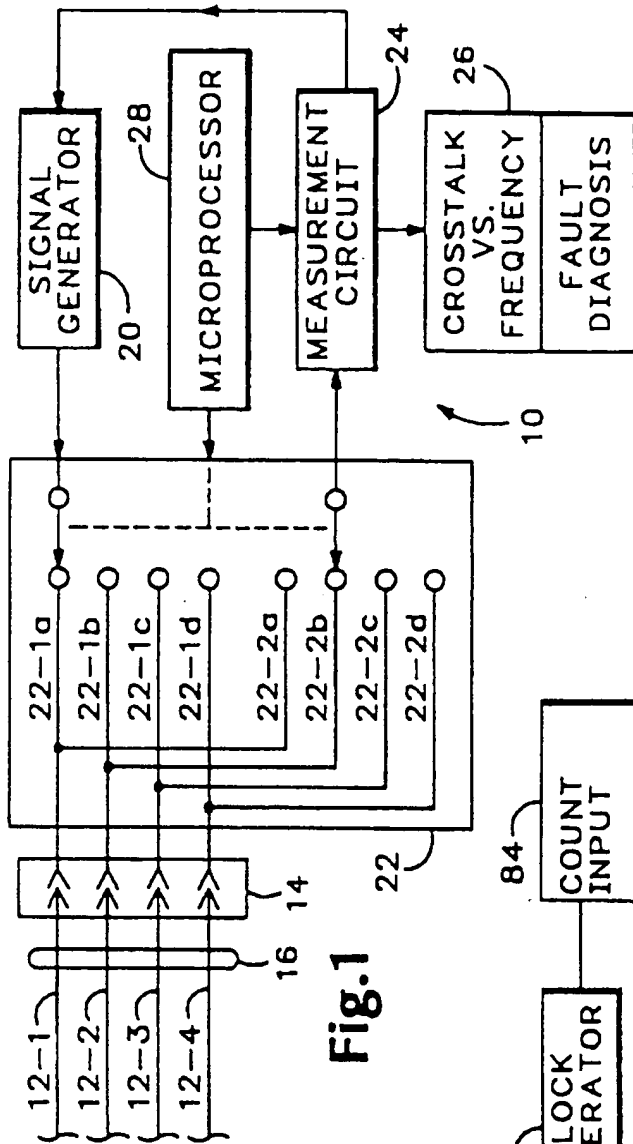



NEXT MEASUREMENT MODEL FOR FAULT LOCATION

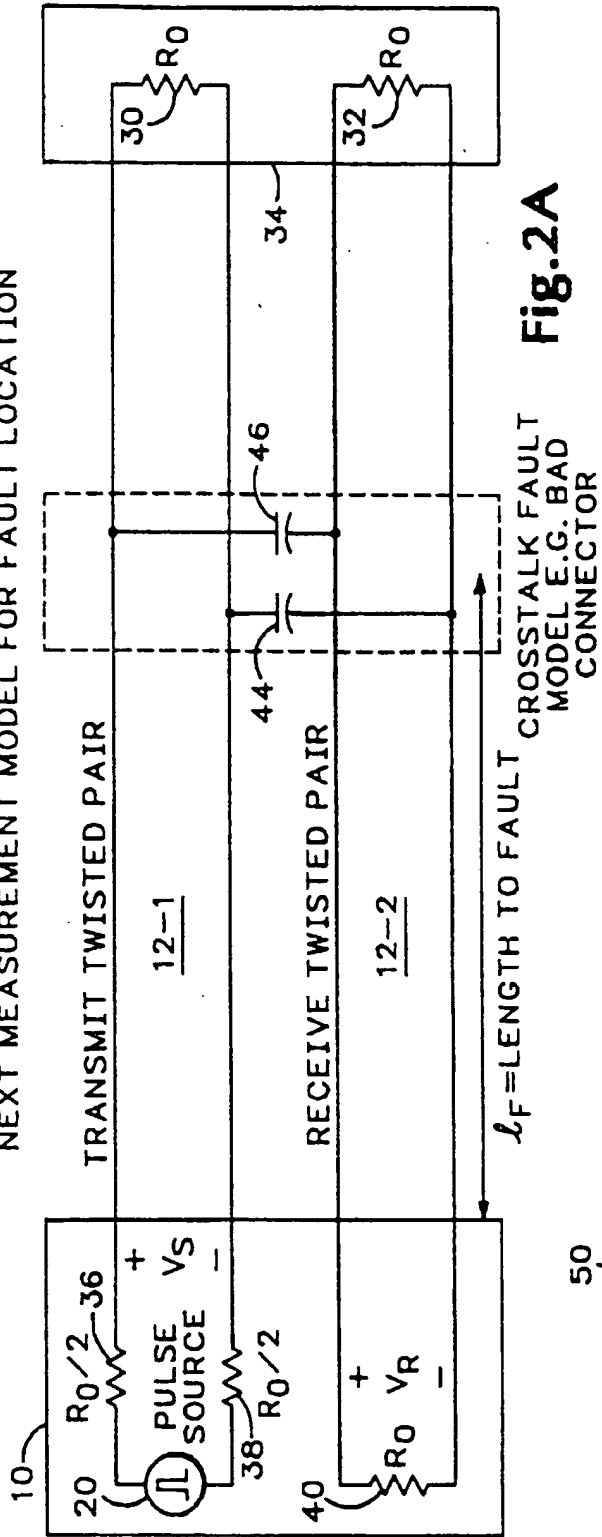


Fig.2A

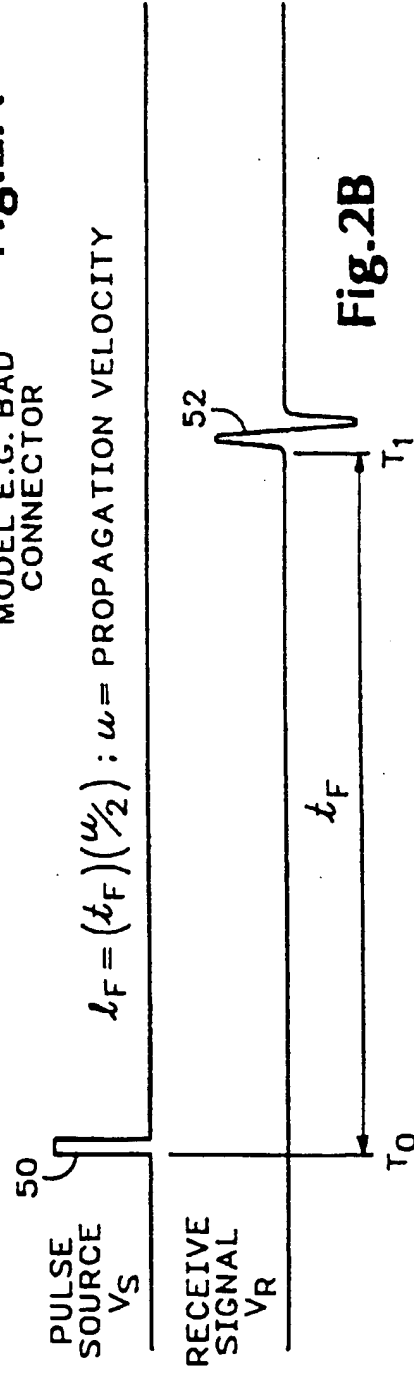


Fig.2B


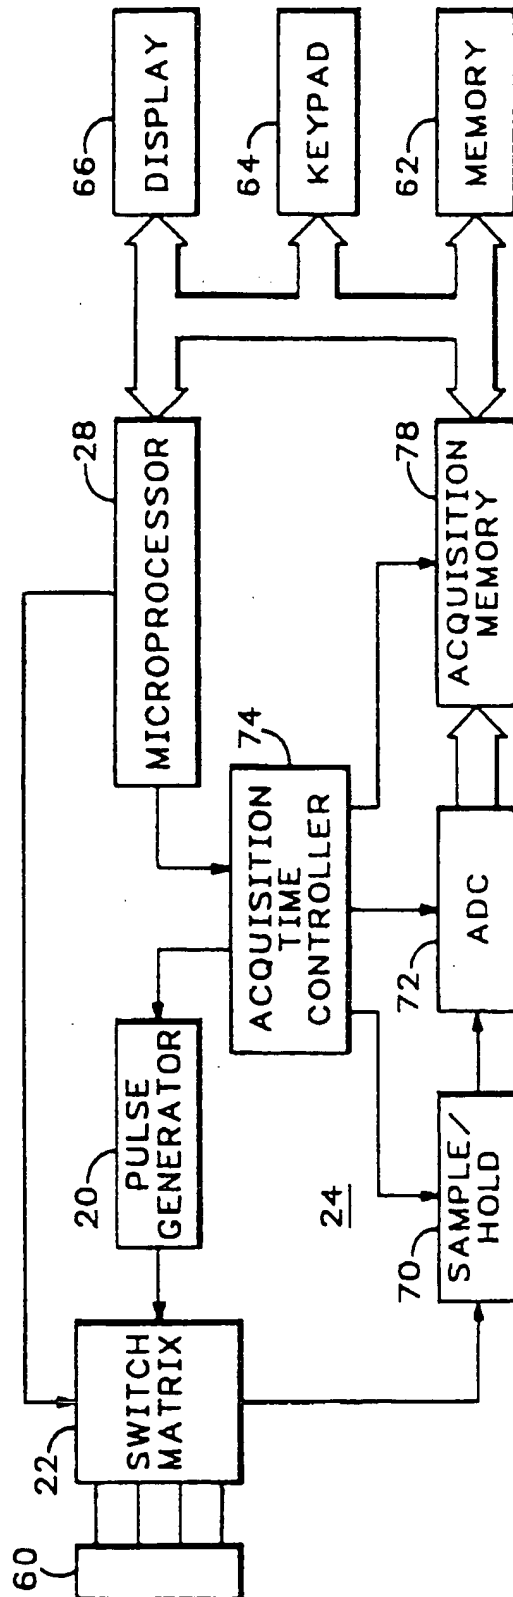


Fig.3



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 675 607 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
21.05.1997 Bulletin 1997/21

(51) Int. Cl.<sup>6</sup>: H04B 3/46

(43) Date of publication A2:  
04.10.1995 Bulletin 1995/40

(21) Application number: 94308731.2

(22) Date of filing: 25.11.1994

(84) Designated Contracting States:  
DE FR GB

(30) Priority: 30.03.1994 US 220068

(71) Applicant: FLUKE CORPORATION  
Everett, Washington 98206-9090 (US)


(72) Inventors:  
• Bottman, Jeffrey S.  
Seattle, WA 98115 (US)

• Drucker, Eric R.  
Seattle, WA 98115 (US)  
• Purnell, Lannes S.  
Edmonds, WA 98020 (US)

(74) Representative: Burke, Steven David et al  
R.G.C. Jenkins & Co.  
26 Caxton Street  
London SW1H 0RJ (GB)

(54) Cable crosstalk measurement system

(57) A cable crosstalk measurement system provides fault diagnostic information to locate faults in addition to providing a crosstalk versus frequency function to test and troubleshoot LAN cables. In a preferred embodiment, a narrow pulse is introduced into one twisted pair of a standard LAN cable, and another twisted pair in the same cable is monitored for crosstalk signal coupling. A measurement system digitizes crosstalk signals using sequential sampling of repetitive signals to provide a waveform record that is a reconstructed equivalent time representation of a real-time crosstalk signal. A microprocessor performs a fast Fourier transform of the waveform record to provide crosstalk versus frequency information, while the waveform record is also examined for higher-than-acceptable amplitude levels to locate poor quality or faulty connectors and cables.

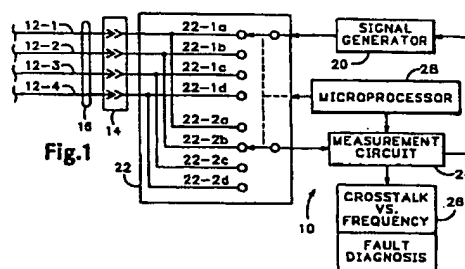

EP 0 675 607 A3




European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 94 30 8731

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	GB 2 065 312 A (THE POST OFFICE) * page 1, line 3 * * page 1, line 7 - page 3, line 19 * ---	1-10	H04B3/46
X A	US 5 063 351 A (GOLDTHORP ET AL.) * column 2, line 22-53 * * column 4, line 34 - column 8, line 60 * ---	1,2,4,5 3,7-10	
A	US 4 630 228 A (TARCZY-HORNOCH ET AL.) * column 1, line 7-9 * * column 2, line 34 - column 10, line 53 * -----	1,3-8,10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H04B G01R
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 27 March 1997	Examiner Zanti, P
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  -----  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 01.92 (P0402)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 675 607 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
25.06.2003 Bulletin 2003/26

(51) Int Cl.7: **H04B 3/46**

(21) Application number: **94308731.2**

(22) Date of filing: **25.11.1994**

(54) **Cable crosstalk measurement system**

Einrichtung zur Messung des Kabelübersprechens

Système de mesure de diaphonie d'un câble

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **30.03.1994 US 220068**

(43) Date of publication of application:  
**04.10.1995 Bulletin 1995/40**

(73) Proprietor: **FLUKE CORPORATION**  
**Everett, Washington 98206-9090 (US)**

(72) Inventors:  
• **Bottman, Jeffrey S.**  
**Seattle, WA 98115 (US)**

• **Drucker, Eric R.**  
**Seattle, WA 98115 (US)**  
• **Purnell, Lannes S.**  
**Edmonds, WA 98020 (US)**

(74) Representative: **Burke, Steven David et al**  
**R.G.C. Jenkins & Co.**  
**26 Caxton Street**  
**London SW1H 0RJ (GB)**

(56) References cited:  
**GB-A- 2 065 312** **US-A- 4 630 228**  
**US-A- 5 063 351**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 675 607 B1**

## Description

### Background of the Invention

[0001] This invention relates generally to cable testing and troubleshooting, and in particular to measuring the crosstalk characteristics between adjacent pairs of cables and extracting diagnostic information to locate faults in cables.

[0002] Local Area Networks (LANs) formed by a large number of interconnected computers, work stations, printers, and file servers are becoming increasingly common in the modern office. In a typical installation, LAN cables may be routed through walls, floors, and ceilings of a building. LAN cable systems not only need to be checked out upon installation, but they require constant maintenance, upgrades, and troubleshooting because LAN cables and connectors are subject to breakage, offices and equipment must be moved, and new equipment are added. A LAN system is most commonly implemented by physically connecting all of these devices with copper-conductor, twisted-pair LAN cables, the most common being an eight-wire cable which is configured in four twisted-wire pairs (commonly referred to simply as "twisted pairs") within a flexible wrapper that may include an electrostatic shield, with each end of the cable terminated in an industry-standard connector.

[0003] Crosstalk level is a performance parameter indicating the level of signal coupling between separate but adjacent data transmission paths, and thus is of great importance for determining problems in twisted-pair cables in LAN systems. It is desirable that the level of isolation be high (and crosstalk level be low) to avoid interference between transmission paths. Accordingly, crosstalk measurement capability is highly desirable in any test tool to be used in LAN cable testing and troubleshooting.

[0004] More sophisticated LAN cable test instruments are often equipped for evaluating crosstalk through standardized near-end crosstalk (commonly referred to as "NEXT") measurements. A conventional method of measuring crosstalk, or NEXT, is to apply a high-frequency sine wave signal to one twisted pair of wires in the cable and measuring the crosstalk signal level in another of the twisted pairs of wires. The sine wave source is incremented in discrete steps across a range of frequencies, while making measurements, and a list of crosstalk versus frequency is generated. This list is compared with a worst-case crosstalk versus frequency function specified for the cable installation under test to determine compliance - that is, whether or not crosstalk levels are acceptable or not. However, this conventional method does not yield any useful diagnostic information to inform the user just exactly what the problem is nor how to fix it. For example, unacceptable crosstalk may be a result of a fault in the cable, such as the cable being physically crushed at some point, or simply a poor quality patch cord somewhere in a LAN run.

[0005] Conventional time domain reflectometers (TDRs) locate faults caused by substantial changes in impedance in a cable, such as opens and shorts, by measuring the elapsed time between a stimulus pulse and a reflected pulse on the same cable; however, such conventional TDR's cannot provide a crosstalk versus frequency function, nor locate a problem such as a faulty or poor quality patch cord that has a perfectly good impedance match to the twisted-pair LAN cable.

[0006] US-A-5 063 351 describes an arrangement for testing a cable communication system which includes a pseudo-noise sequence generator for producing a stream of bits that are normally distributed, and a digital filter, responsive to the sequence generator, for implementing a frequency characteristic corresponding to the spectral content of an interfering source as weighted by a near-end crosstalk path. The circuit thus digitally generates a crosstalk signal indicative of the combined effect of one or more interfering sources and the near-end crosstalk coupling path linking the interfering sources with the system under test.

[0007] GB-A-2 065 312 describes apparatus for locating crosstalk faults in telecommunications cables to a resolution of around 10 metres. For every potential crosstalk coupling distance, the apparatus stores (or calculates) an expected crosstalk waveform in the form of a number of time-spaced samples. The actual received waveform is cross-correlated with each potential waveform, the correlation giving the greatest result thus indicating the coupling distance.

### Summary of the Invention

[0008] Aspects of the present invention are set out in the accompanying claims.

[0009] In accordance with a preferred embodiment of the present invention, a cable crosstalk measurement system provides fault diagnostic information to locate the cause of poor crosstalk performance in addition to providing a crosstalk versus frequency function in order to test and troubleshoot twisted-pair LAN cables.

[0010] A cable test instrument applies stimulus signals to a selected one twisted pair in a LAN cable while monitoring crosstalk signal coupling on a separate but adjacent twisted pair within the same bundle or cable. A measurement system analyzes any crosstalk signals and provides diagnostic information for locating faults in the cable as well as providing crosstalk versus frequency information to determine whether acceptable or not.

[0011] The preferred embodiment of the present invention takes advantage of the well-known fact that the frequency spectrum of a pulse may be determined primarily by the width and amplitude of the pulse. A pulse generator repetitively applies a relatively narrow stimulus pulse (e.g., on the order of four or five nanoseconds) to a switch matrix that directs the stimulus pulse to a selected one of a plurality of twisted pairs while connecting one of the other twisted pairs to a waveform digitizer.

The waveform digitizer records the received crosstalk waveform by means of sequential sampling to provide a reconstructed equivalent-time waveform of the crosstalk signal. A fast Fourier transform (FFT) is performed on the digitized crosstalk waveform record to provide, when normalized and scaled, a table of crosstalk versus frequency information. This information may then be used to check against the specified worst-case crosstalk requirements for the particular LAN cable to determine compliance.

[0012] In addition, the digitized crosstalk waveform record is examined for relatively large spikes or peaks. The time of occurrence of a spike may be used to approximate with a fair degree of accuracy the physical location along the cable run of the event or situation causing the crosstalk spike. Timing information is provided by recording the elapsed time from the launch of a stimulus pulse to detection of the spike, and then distance to the fault may be calculated.

[0013] In an alternative embodiment, a cable test apparatus discriminates the location of spikes exceeding a predetermined threshold amplitude, and presents only distance-related faults to the user.

[0014] Arrangements embodying the present invention will now be described, in conjunction with the accompanying drawings.

#### Brief Description of the Drawings

##### [0015]

Fig. 1 is a generalized block diagram of a cable testing and troubleshooting apparatus in accordance with the present invention;

Figs. 2A and 2B is near-end crosstalk (NEXT) model showing respectively a measurement structure and a waveform diagram;

Fig. 3 is a preferred embodiment of the present invention in detailed block diagram form; and

Fig. 4 is a block diagram of an alternative embodiment of the present invention.

#### Detailed Description of the Invention

[0016] Referring to Fig. 1 of the drawings, there is shown a generalized block diagram of a cable testing and troubleshooting apparatus 10 coupled via an industry-standard connector 14 to one end of an exemplary LAN cable 12 which is configured in four twisted-wire pairs (or simply twisted pairs, as they are known in the relevant industry) 12-1, 12-2, 12-3, and 12-4 within a flexible sheath 16 that may function as an electrostatic shield. It should be pointed out that LAN cables typically are unshielded. A signal generator 20 within apparatus 10 generates stimulus signals to test the LAN cable 12, and such stimulus signals are applied via a switch matrix 22 to a selected one of the twisted-wire pairs. A measurement circuit 24 is coupled to a second one of the

twisted-wire pairs via switch matrix 22 to receive any crosstalk signals, that is, signals that result in a coupling of the stimulus signal from the selected twisted-wire pair to the second one. Measurement circuit 24 analyzes the crosstalk signals and provides on a display device 26 crosstalk versus frequency information as well as diagnostic information for locating faults in the LAN cable. In the example shown, the output of signal generator 20 is connected to twisted pair 12-1 through the closed contacts 22-1 a of switch matrix 22, and measurement circuit 24 is connected to twisted pair 12-2 through the closed contacts 22-2b of switch matrix 22. A microprocessor 28 provides overall control of the apparatus 10, including establishing signal routing and operation of switch matrix 22, and controlling measurement circuit 24 analyze crosstalk signals. Measurement circuit 24 also issues command signals to signal generator 20 to generate stimulus signals.

[0017] In order to provide diagnostic information to locate faults in the LAN cable, a timing relationship must exist between stimulus signals generated by the signal generator 20 and crosstalk signals analyzed by the measurement circuit 24. To gain an appreciation of this timing, refer to the near-end crosstalk, or NEXT, measurement model of Figs. 2A and 2B, which show respectively a model of the measurement structure and a waveform diagram.

[0018] In Fig. 2A, cable test instrument 10 is coupled to a near end of a cable including twisted pairs 12-1 and 12-2 in the manner described in connection with Fig. 1. The far end of each twisted pair in the model is terminated with termination resistors 30 and 32, which match the characteristic impedance of the cable. Termination resistors 30 and 32 may suitably be part of a remote unit 34 supplied with cable test instrument 10 connected to the far end of the cable. The near ends of twisted pairs 12-1 and 12-2 are likewise terminated with termination resistors 36 and 38, each of which are equal to one-half the characteristic impedance of the cable, and resistor 40. In a proposed commercial embodiment of the present invention, both the near and far ends of the cable are coupled to balanced-to-unbalanced transformers in order to achieve balanced cable drive and to facilitate functions other than the measurement system described herein; however, the equivalent circuit over the measurement frequency band is as shown in Fig. 2A. Signal generator 20, which suitably may be a pulse generator, generates a stimulus pulse which is launched down the transmission path of twisted pair 12-1. Any crosstalk coupled across to separate but adjacent twisted pair 12-2 propagates back to the measurement system and is developed as a received signal across resistor 40. Let us suppose that a fault, such as a bad connector, exists at some distance  $L_f$  from the near end of cable 12. This fault is modeled by capacitors 44 and 46. It should be noted that the impedance represented by this type of fault is typically large relative to the characteristic impedance of the cable, and therefore would not

be located by any test instruments that look for impedance discontinuities, such as time domain reflectometers and the like. However, the impedance modeled by capacitors 44 and 46 causes sufficient coupling to result in NEXT failure.

[0019] Referring now to Fig. 2B, a stimulus pulse 50 is generated by signal generator 20 and launched down the transmission path represented by twisted pair 12-1 at a time  $T_0$ . Pulse 50 propagates at a velocity  $V$ , which is a percentage of the speed of light and is approximately equal to eight inches per nanosecond (or 20 centimeters per nanosecond) in an electrical cable, down twisted pair 12-1 to the fault represented by capacitors 44 and 46, where it is coupled across to twisted pair 12-2. The coupled crosstalk signal in turn propagates back to cable test instrument 10 via twisted pair 12-2 at a velocity  $V$ , and arrives at resistor 40 after an elapsed time  $T_F = T_1 - T_0 = 2L_F/V$ . Waveform 52 represents that part of the received signal that is due to equivalent coupling capacitors 44 and 46. Distance to the fault (length of cable from instrument 10 to the fault) may then be calculated as  $L_F = \frac{1}{2} T_F V$ .

[0020] A cable testing and troubleshooting apparatus in accordance with a preferred embodiment takes advantage of the well-known fact that the frequency spectrum of a pulse may be determined primarily by the width and amplitude of a pulse such as pulse 50. A relatively narrower pulse 50, e.g., on the order of five nanoseconds, will produce a frequency spectrum that has a greater percentage of its power at higher frequencies, e.g., up to about 100 megahertz, while a relatively wider pulse 50, e.g., on the order of 30 nanoseconds, will produce a frequency spectrum that has a greater percentage of its power at lower frequencies, e.g., up to about 20 megahertz.

[0021] A preferred embodiment of the present invention is shown in Fig. 3. Cable test apparatus 10 includes a connector 60 for connecting the cable test apparatus to a cable under test. The connector 60 may be selected to accommodate any type of cable or any number of transmission lines. In the embodiment shown, connector 60 is an industry-standard RJ-45 connector adapted to mate with the connector of a conventional eight-wire LAN cable which is configured in four twisted-wire pairs. Signal generator 20 is a pulse generator which generates a relatively narrow pulse, e.g., on the order of five nanoseconds as described above, upon initiation of a pulse command signal from an acquisition timing controller 74 (to be discussed later), which in turn is controlled by microprocessor 28. The pulses are repetitively produced about eight microseconds apart, which allows sufficient time to sample crosstalk signals from faults that are a substantial distance from the measurement system so that the measurement system can be used to detect crosstalk faults on virtually any local area network.

[0022] Microprocessor 28 is connected via a typical bus structure to a memory 62, which may include both

random-access and read-only memories, a keypad 64 for entry of user-defined information, and a display device 66, which may be a flat-panel liquid-crystal display (LCD) device and its associated display circuitry.

[0023] Microprocessor 28 also provides a control signal to switch matrix 22, which may suitably consist of digitally-controlled relays of conventional design for routing a stimulus pulse from signal generator 20 to a selected twisted pair, and crosstalk signals from another twisted pair to measurement circuit 24.

[0024] Measurement circuit 24 is a waveform digitizer similar to that used for digitizing waveforms of input signals in a conventional digital storage oscilloscope, and therefore includes conventional and well known elements, and is operated in a conventional mode known in art as sequential sampling wherein samples acquired from a number of repetitive signals are later reconstructed in an equivalent-time record representing one real-time signal. This permits sampling a higher effective rate than the available sampling clock rate, which is required to sample crosstalk signals which are artifacts of five-nanosecond duration stimulus pulses.

[0025] Crosstalk signals received via switch matrix 22 from the twisted pair being monitored are applied to a sample/hold amplifier 70 which freezes the amplitude of the crosstalk signal long enough to be converted to a digital representation by analog-to-digital converter (ADC) 72. If desired, suitable signal conditioning circuits, such as amplifiers, attenuators, filters, etc., may be interposed in the signal path before digitizing in order to match signal conditions with the capabilities of the waveform digitizer.

[0026] Acquisition timing is provided by acquisition timing controller 74, which may suitably be a digital signal processor (DSP) in combination with a programmable logic device and a high-speed (about 60 megahertz in this embodiment) clock oscillator to provide the desired timing and control. Acquisition time controller 74 initiates pulse command signals to signal generator 20, as discussed earlier, and also applies sample/hold signals to sample/hold amplifier 70 and conversion control signals to ADC 72 at a rate of about four megahertz. The sample/hold and ADC control signals are generated in progressively increasing delay increments of two nanoseconds via an internal delay line following initiation of pulse command signals applied to signal generator 20. Thus, while the conversion rate of sample/hold amplifier 70 and ADC 72 in this embodiment is about four megahertz, the well-known sequential sampling technique permits an effective sampling rate of 500 megahertz. In accordance with the well-known Nyquist sampling theorem, this permits sampling crosstalk signals in a frequency spectrum to 250 megahertz.

[0027] The converted digitized samples, each representing an instantaneous amplitude of the received crosstalk signal, are transported by the acquisition timing controller to a fast acquisition waveform memory 78. Although the samples are not obtained in chronological



order, they are reordered into their proper time sequence when stored in memory 78, as is well known to those skilled in the art. Thereafter, the waveform record is retrieved by microprocessor 28 and moved to memory 62. Thus, the waveform digitizer records the received crosstalk waveform by means of sequential sampling to provide a reconstructed equivalent-time waveform of the crosstalk signal.

[0028] A fast Fourier transform (FFT) is performed by microprocessor 28 on the digitized crosstalk waveform record to provide, when normalized and scaled, a table of crosstalk versus frequency information which may be viewed on display device 66. This information may then be used to check against the specified worst-case crosstalk requirements for the particular LAN cable installation to determine compliance.

[0029] In addition, the digitized crosstalk waveform record is examined for relatively large spikes or peaks. The time of occurrence of a spike may be used to approximate with a fair degree of accuracy the physical location along the cable run of the event or situation causing the crosstalk spike. Timing information is provided by recording the elapsed time from the launch of a stimulus pulse to detection of the spike, and then distance to the fault may be calculated.

[0030] In an alternative embodiment of measurement circuit 24 shown in Fig. 4, a cable test apparatus discriminates the location of spikes exceeding a predetermined threshold amplitude, and presents only distance-related faults to the user. Crosstalk signals received via switch matrix 22 are coupled to a signal conditioning circuit 80, which adjusts the signals to a suitable level for comparison with a predetermined threshold level by comparator 82. That is, if a crosstalk spike or peak voltage exceeds a predetermined level, the output of comparator 82 changes states. A counter 84 is enabled by initiation of a stimulus pulse and counts high-speed clock signals from a clock 86 until count is stopped by the output of comparator 82. The elapsed time from counter 84 may be read out directly in terms of distance on display device 90.

[0031] While we have shown and described the preferred embodiment of our invention, it will be apparent to those skilled in the art that many changes and modifications may be made without departing from our invention in its broader aspects. For example, signal generator 20 could generate gated-on short-duration bursts of high frequency sine wave signals to build a crosstalk versus frequency table similar to that produced by conventional cable testers, with the time information for diagnostic fault location being extracted from the gating commands. Also, with appropriate controls and additional circuitry, measurement circuit 24 could be implemented by those skilled in the art as a conventional random-sampling waveform digitizer. Alternatively, single shot acquisition could be implemented with suitable high-speed waveform digitizer circuits and attendant increased cost.

## Claims

### 1. A cable testing apparatus, comprising:

a signal generator (20) for generating stimulus signals having a predetermined amplitude and a predetermined frequency spectral content for a first transmission line in a cable (12) under test;

a measurement system (24, 28) connected to a second transmission line in said cable (12) under test to receive crosstalk signals produced in response to said stimulus signals, said measurement system (24, 28) including means for measuring crosstalk signal levels, means for detecting crosstalk signals which exceed a predetermined threshold, means for measuring the elapsed time between generation of said stimulus signal and said detected crosstalk signals, and means for calculating from said elapsed time a distance along said cable under test.

### 2. A cable test apparatus in accordance with claim 1 wherein said measurement system (24, 28) also provides an indication of crosstalk versus frequency.

### 3. A cable test apparatus in accordance with claim 1 or 2, wherein said measurement means is a waveform digitizer which provides a digitized waveform record of said crosstalk signals.

### 4. A cable test apparatus in accordance with claim 3 further including means (28) for analyzing said digitized waveform record to provide crosstalk versus frequency information.

### 5. A cable test apparatus in accordance with claim 4 wherein said means (28) for analyzing said digitized waveform record is a processor which performs a fast Fourier transform.

### 6. A cable test apparatus in accordance with any preceding claim wherein said stimulus signals are relatively short-duration pulses.

### 7. A method of testing a cable, comprising:

generating stimulus pulses having a predetermined amplitude and a predetermined frequency spectral content for a first transmission line in a cable (12) under test;

receiving, from a second transmission line in said cable (12) under test, crosstalk signals produced in said second transmission line in response to said stimulus pulses in said first transmission line, and providing a digitized

- waveform record of said crosstalk signals; and using said digitized waveform record of said crosstalk signals for measuring crosstalk signal levels, detecting crosstalk signals which exceed a predetermined threshold, measuring the elapsed time between said stimulus signal and said detected crosstalk signals, and calculating from said elapsed time a distance along said cable (12) under test to provide at least one location within said cable (12) under test where crosstalk signals exceed a predetermined level.
8. A method in accordance with claim 7, including extracting from said digitized waveform record crosstalk amplitude versus frequency information over said predetermined frequency spectrum of said stimulus pulse.
9. A method in accordance with claim 8, including employing a Fast Fourier Transform to extract said crosstalk amplitude versus frequency information from said digitized waveform record.
- Patentansprüche**
1. Kabeltestgerät mit:
- einem Signalerzeuger (20) zum Erzeugen von Stimulussignalen mit einer vorgegebenen Amplitude und einem vorgegebenen Frequenzspektrumsinhalt für eine erste Übertragungsleitung in einem zu untersuchenden Kabel (12);
- einen Meßsystem (24, 28), das mit einer zweiten Übertragungsleitung in dem zu untersuchenden Kabel (12) verbunden ist, um Übersprechsignale, die als Reaktion auf die Stimulussignale erzeugt werden, zu empfangen, wobei das Meßsystem (24, 28) eine Vorrichtung zum Messen von Übersprechsignalpegeln, eine Vorrichtung zum Detektieren von einem vorbestimmten Schwellenwert überschreitenden Übersprechsignalen, eine Vorrichtung zum Messen der Laufzeit zwischen der Erzeugung des Stimulussignals und den detektierten Übersprechsignalen, und eine Vorrichtung zum Berechnen eines Abstands längs des zu untersuchenden Kabels aus der Laufzeit.
2. Gerät nach Anspruch 1, wobei das Meßsystem (24, 28) außerdem eine Darstellung von Übersprechen gegenüber Frequenz bereitstellt.
3. Gerät nach Anspruch 1 oder 2, wobei die Meßvorrichtung ein Wellenform-Digitalisierer ist, der eine digitalisierte Wellenformaufnahme der Übersprechsignale bereitstellt.
4. Gerät nach Anspruch 3, mit weiterhin einer Vorrichtung zum Analysieren der digitalisierten Wellenformaufnahme, um Übersprech-gegen-Frequenz-Informationen bereitzustellen.
5. Gerät nach Anspruch 4, wobei die Vorrichtung (28) zum Analysieren der digitalisierten Wellenformaufnahme ein Prozessor ist, der eine Fast-Fourier-Transformation durchführt.
6. Gerät nach einem der vorhergehenden Ansprüche, wobei die Stimulussignale Pulse relativ kurzer Dauer sind.
7. Verfahren zum Testen eines Kabels, wobei
- für eine erste Übertragungsleitung in einem zu untersuchenden Kabel (12) Stimuluspulse erzeugt werden, die eine vorgegebene Amplitude und einen vorgegebenen Frequenzspektrumsinhalt aufweisen,;
- von einer zweiten Übertragungsleitung in dem zu untersuchenden Kabel (12) Übersprechsignale empfangen werden, die in der zweiten Übertragungsleitung als Reaktion auf die Stimuluspulse in der ersten Übertragungsleitung auftreten, und eine digitalisierte Wellenformaufnahme der Übersprechsignale bereitgestellt wird; und
- die digitalisierte Wellenformaufnahme der Übersprechsignale zum Messen der Übersprechsignalpegel, zum Detektieren von einem vorbestimmten Schwellenwert überschreitenden Übersprechsignalen, zum Messen einer Laufzeit zwischen dem Stimulussignal und den detektierten Übersprechsignalen, und zum Berechnen eines Abstands längs des zu untersuchenden Kabels (12) aus der Laufzeit, benutzt wird, um mindestens eine Stelle innerhalb des zu untersuchenden Kabels (12) bereitzustellen, wo die Übersprechsignale einen vorgegebenen Pegel überschreiten.
8. Verfahren nach Anspruch 7, wobei weiterhin aus der digitalisierten Wellenformaufnahme Übersprechamplitude-gegen-Frequenz-Informationen über das vorgegebene Frequenzspektrum des Stimuluspulses erhalten werden.
9. Verfahren nach Anspruch 8, wobei eine Fast-Fourier-Transformation angewandt wird, um Übersprechamplitude-gegen-Frequenz-Informationen aus der digitalisierten Wellenformaufnahme zu erhalten.

## Revendications

### 1. Appareil d'essai de câble, comprenant :

un générateur de signaux (20) servant à générer des stimuli ayant une amplitude prédéterminée et une composition spectrale de fréquence prédéterminée pour une première ligne de transmission dans un câble (12) sous essai ;  
un système de mesure (24, 28) relié à une seconde ligne de transmission dans ledit câble (12) sous essai pour recevoir des signaux de diaphonie produits en réponse auxdits stimuli, ledit système de mesure (24, 28) comprenant des moyens pour mesurer les niveaux de signaux de diaphonie, des moyens pour détecter les signaux de diaphonie qui dépassent un seuil prédéterminé, des moyens pour mesurer le temps écoulé entre la génération dudit stimulus et lesdits signaux de diaphonie détectés, et des moyens pour calculer, à partir dudit temps écoulé, une distance le long dudit câble sous essai.

2. Appareil d'essai de câble selon la revendication 1, dans lequel ledit système de mesure (24, 28) fournit également une indication de la diaphonie en fonction de la fréquence.

3. Appareil d'essai de câble selon la revendication 1 ou la revendication 2, dans lequel lesdits moyens de mesure sont constitués par un numériseur de formes d'onde qui fournit un enregistrement des formes d'onde numérisées desdits signaux de diaphonie.

4. Appareil d'essai de câble selon la revendication 3, comprenant, en outre, des moyens (28) pour analyser ledit enregistrement de formes d'onde numérisées pour fournir des informations de diaphonie en fonction de la fréquence.

5. Appareil d'essai de câble selon la revendication 4, dans lequel lesdits moyens (28) servant à analyser ledit enregistrement de formes d'onde numérisées est un processeur qui effectue une transformée de Fourier rapide.

6. Appareil d'essai de câble selon l'une quelconque des revendications précédentes, dans lequel lesdits stimuli sont des impulsions de durée relativement courte.

7. Procédé d'essai d'un câble, consistant à :



générer des stimuli ayant une amplitude prédéterminée et une composition spectrale de fréquence prédéterminée pour une première ligne

de transmission dans un câble (12) sous essai ; recevoir, à partir d'une seconde ligne de transmission dans ledit câble (12) sous essai, des signaux de diaphonie produits dans ladite seconde ligne de transmission en réponse auxdits stimuli dans ladite première ligne de transmission, et fournir un enregistrement de formes d'onde numérisées desdits signaux de diaphonie ; et


utiliser ledit enregistrement des formes d'onde numérisées desdits signaux de diaphonie pour mesurer les niveaux des signaux de diaphonie, détecter les signaux de diaphonie qui dépassent un seuil prédéterminé, mesurer le temps écoulé entre ledit stimulus et lesdits signaux de diaphonie détectés, et calculer, à partir dudit temps écoulé, une distance le long dudit câble (12) sous essai pour fournir au moins un emplacement à l'intérieur dudit câble (12) sous essai où les signaux de diaphonie dépassent un niveau prédéterminé.

8. Procédé selon la revendication 7, comprenant l'extraction, à partir dudit enregistrement de formes d'onde numérisées, d'informations d'amplitude de diaphonie en fonction de la fréquence dans ledit spectre de fréquences prédéterminé dudit stimulus.


9. Procédé selon la revendication 8, comprenant l'utilisation d'une Transformée de Fourier Rapide pour extraire lesdites informations d'amplitude de diaphonie en fonction de la fréquence à partir dudit enregistrement de formes d'onde numérisées.

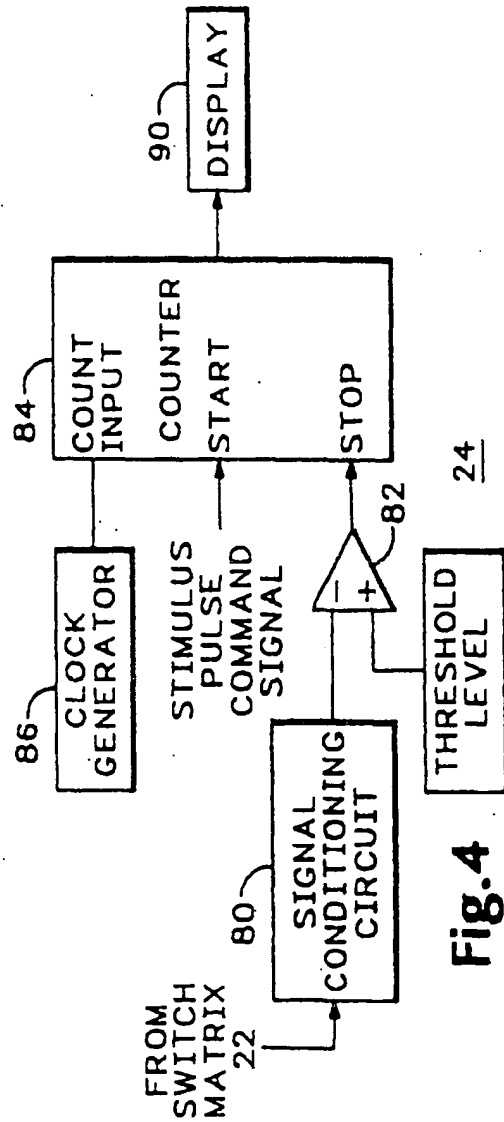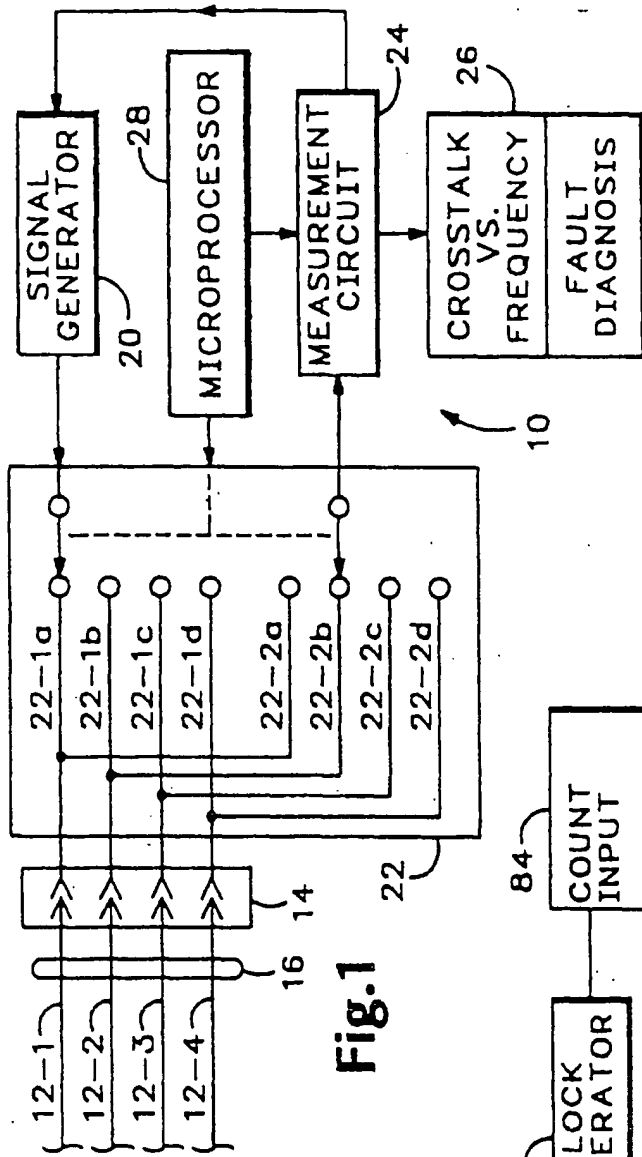

# NEXT MEASUREMENT MODEL FOR FAULT LOCATION

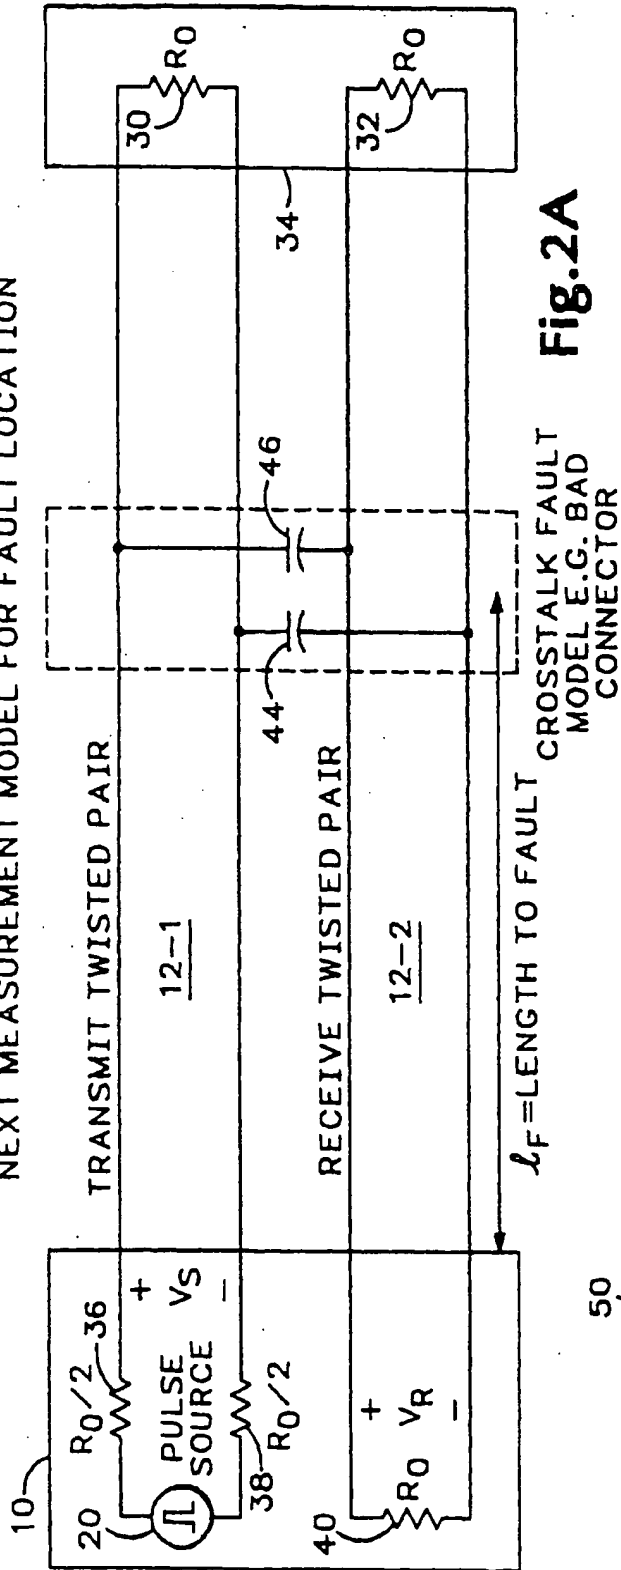

$$l_F = (t_F) \left( \frac{w}{2} \right); w = \text{PROPAGATION VELOCITY}$$

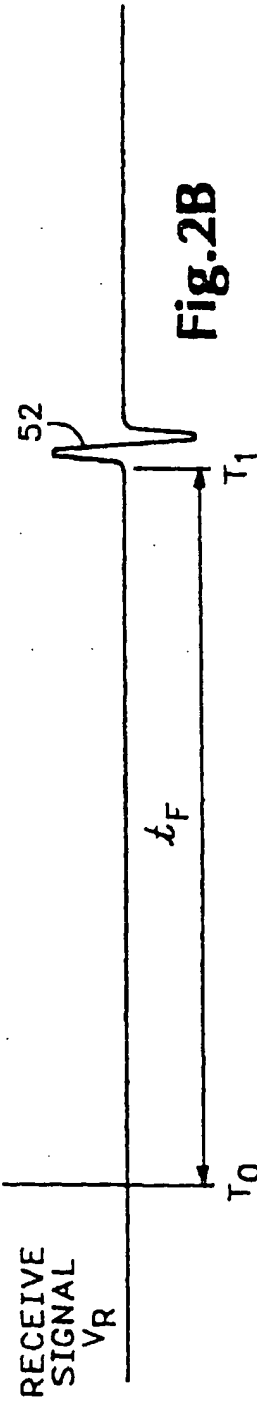

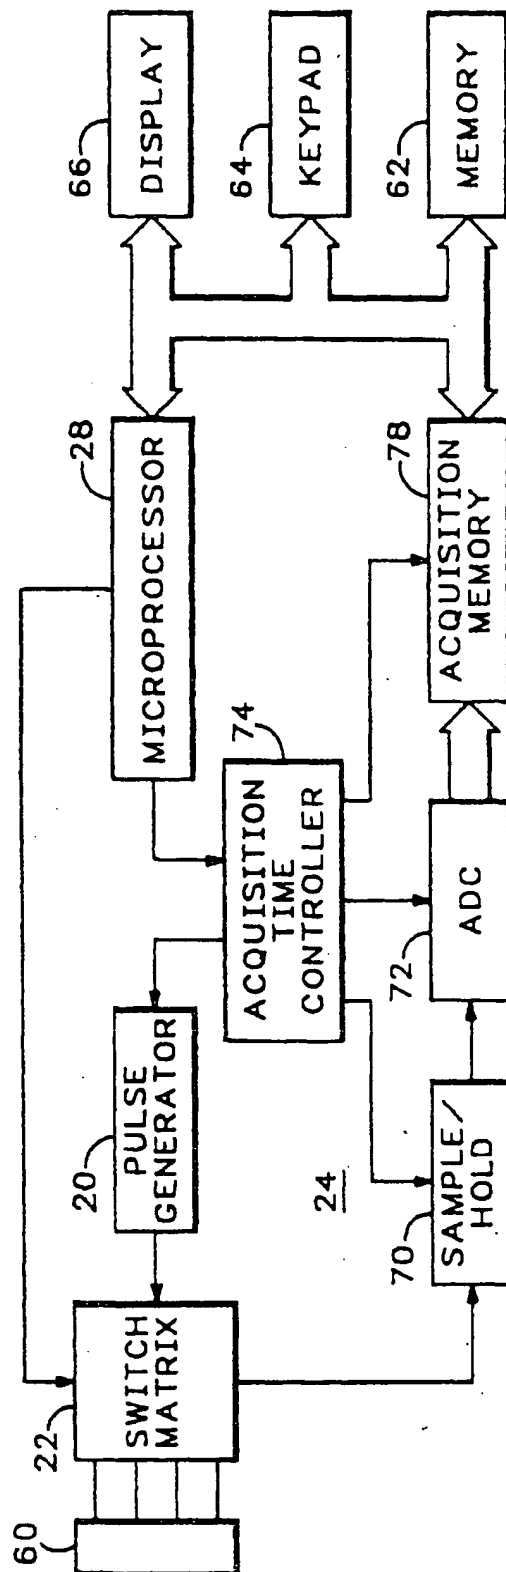


Fig.3